





#### LTPF9


Note: Product may vary slightly from image shown

- 9,000 lbs lifting capacity
- Automatic safety locks, with single point release
- High polymer polyethylene wear resistant slide blocks
- Chain over hydraulic cylinders
- Screw up pads
- Height limit switch
- Rubber door guards
- Powder coat finish for durability
- Three stage front arms
- Truck adapters standard




#### **Specifications**

Power - 240V 3HP 13A PH1 60Hz

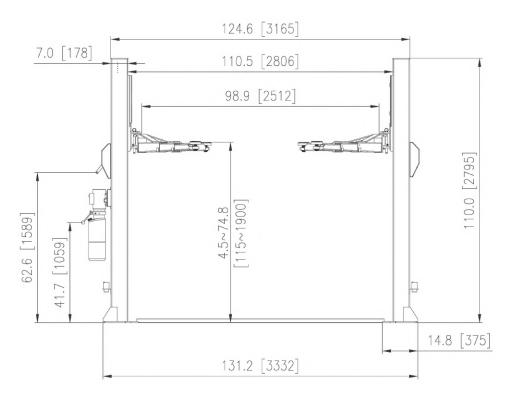

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

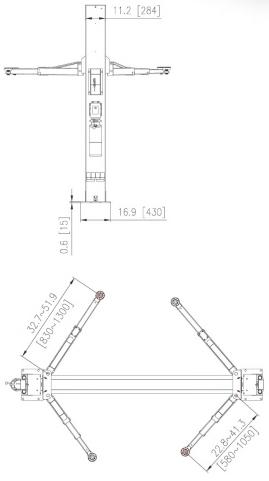

Shipping Dimensions: Lift 114" x 18" x 30" 1300lbs Pump 31" x 12" x 11" 60lbs





LTPA10


Note: Product may vary slightly from image shown

- 10,000 lbs lifting capacity with arms fully extended
- Automatic safety locks, with single point lock
- High polymer polyethylene wear resistant slide blocks
- Dual direct drive cylinders with cable equalization
- Screw up pads
- Height limit switch
- Rubber door guards
- Powder coat finish for durability
- Three stage front arms
- · Truck adapters standard



#### **Specifications**

Power - 240V 3HP 13A PH1 60Hz

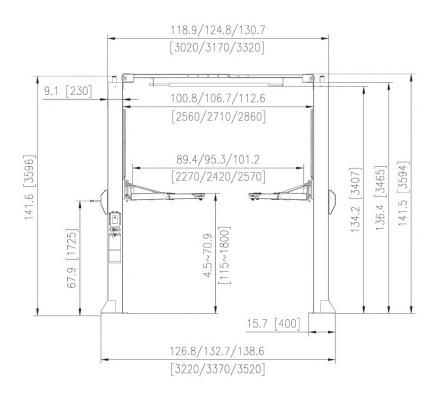

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM


#### 3 Width Settings

Narrow Width: Drive Through - 88.6" Medium Width: Drive through - 94.5" Wide Width: Drive Through - 100.4"

Note: 3 Bolts must be inserted for proper sizing to allow the cables to fit correctly

Shipping Dimensions: Lift 145" x 30" x 26" 1700lbs Pump 31" x 12" x 11" 60lbs

Optional Height Kit 30" x 15" x 11" 165lbs

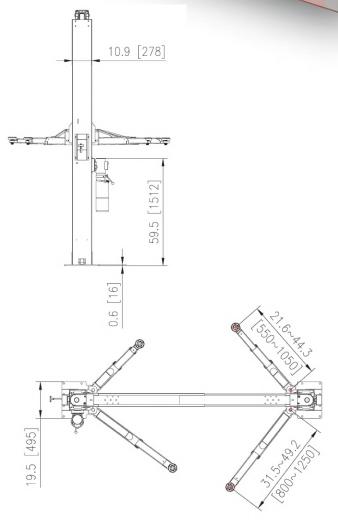






BR10-2OH-33

Note: Product may vary slightly from image shown

#### Asymmetric & Symmetric Three Stage Arms




- Automatic safety locks, with single point lock release system
- Automatic arm restraints
- Dual direct drive hydraulic cylinders
- Compact three stage front and rear arm design allows for asymmetric & symmetric lifting
- Height extensions included -1.5", 3" & 6
- Matte powder coat finish
- Two stage drop in pads
- ALI CERTIFIED
- 1 Year warranty


# Daytona

#### BR10-20H-33 10,000 LBS 2-POST OVERHEAD LIFT ALI CERTIFIED

#### **Specifications**

Power - 220V 3 HP 12A 1Ph 60Hz

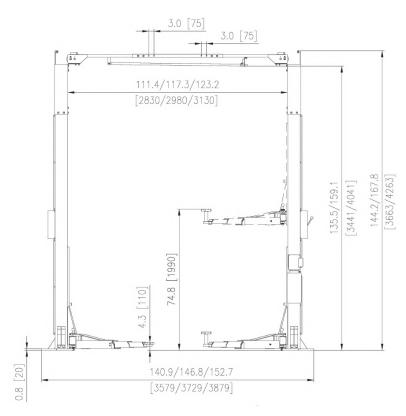

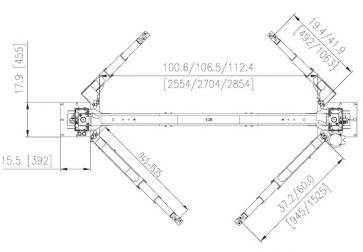

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

#### 3 Width Settings

Narrow Width: Overall - 140.43" Inside Columns - 111.42" Drive Through - 88.15" Medium Width: Overall - 146.34" Inside Columns - 117.32" Drive through - 94.06" Wide Width: Overall - 152.24" Inside Columns - 123.23" Drive Through - 99.96"

Shipping Dimensions: Lift 142" x 23" x 44" 2100lbs

Pump attached to lift. Included in dimensions Optional Height Kit 31" x 18" x 17" 200lbs





#### LTPF12


Note: Product may vary slightly from image shown

- 12,000 lbs lifting capacity
- Automatic safety locks, with single point lock release
- High polymer polyethylene wear resistant slide blocks
- Dual chain drive Hydraulic cylinders
- Screw up pads
- Height limit switch
- Rubber door guards
- Powder coat finish for durability
- Three stage front arms
- Truck adapters standard




#### **Specifications**

Power - 240V 3HP 13A PH1 60Hz

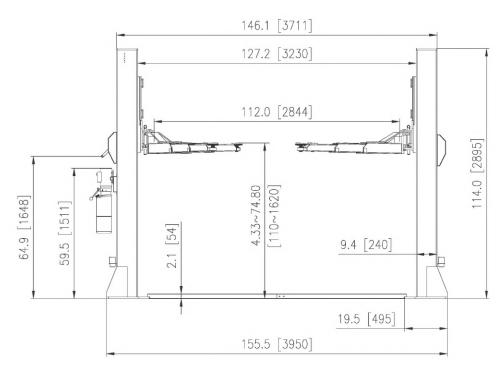

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

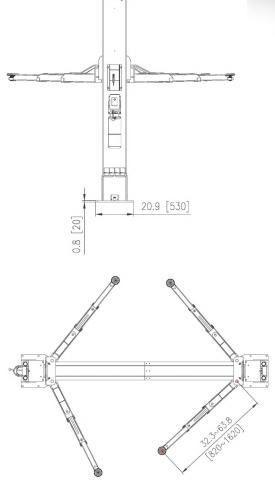

Shipping Dimensions: Lift 116" x 22" x 39" 2200lbs Pump 31" x 12" x 11" 60lbs




- Full length rubber door guards
- Powder coat finish for durability
- Three stage front arms and rear arms
- · Truck adapters standard
- Optional height kit adds 2 feet of clearance under overhead bar (not included)



#### **Specifications**

Power - 240V 3HP 13A PH1 60Hz

Please note, these blueprints are for the lift at its most narrow width setting. When assembled at its widest width setting, the overall width changes from 150.3" to 163"

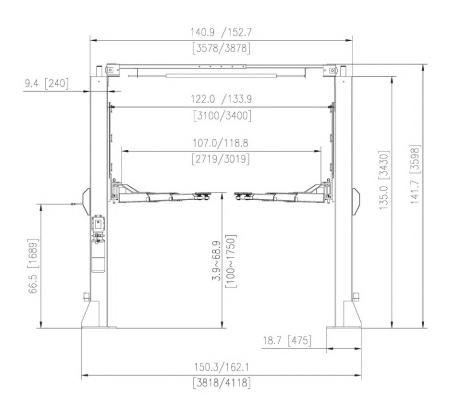

#### 3 Width Settings

Narrow Width: Drive Through - 107" Medium Width: Drive through - 113" Wide Width: Drive Through - 119"

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 138" x 22" x 41" 2400lbs
Pump 31" x 11" x 12" 60lbs
Optional Height Kit 32" x 15" x 18" 210lbs






- 15,000 lbs lifting capacity with arms fully extended
- Automatic safety locks, with single point lock
- High polymer polyethylene wear resistant slide blocks
- Dual direct drive Hydraulic cylinders
- Screw up pads
- Height limit switch
- Rubber door guards
- Powder coat finish for durability
- Three stage front arms and rear arms
- Truck adapters standard




#### LTPO15 15,000 LBS 2-POST OVERHEAD LIFT

#### **Specifications**

Power - 240V 3HP 13A PH1 60Hz

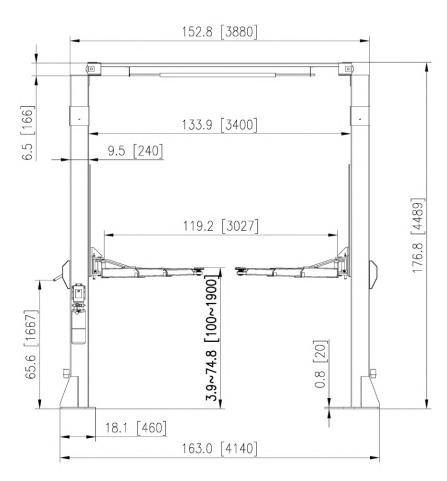

Please note, this blueprint shows the height extension kit on the LTPO15 lift. Overall height without the height extension kit is 157". This lift must be sold WITH the height kit.



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 155" x 25" x 40" 2700lbs
Pump 31" x 11" x 12" 60lbs
Optional Height Kit 26" x 12" x 18" 200lbs





#### **Features**


- Four mechanical locking devices, each equipped with both primary and secondary safety locks
- Single point manual safety release
- Removable tilting Aluminum approach ramp
- · Large heavy duty 3" cylinder
- Aircraft quality lifting cables
- · Matted powder coat finish
- Adjustable runways
- Pump can be mounted on any post





Note: Product may vary slightly from image shown

#### autona LFPP9 9,000 LBS 4-POST **PARKING LIFT Specifications**

Power - 120V 1.5HP 26Amp 1 PH 60Hz

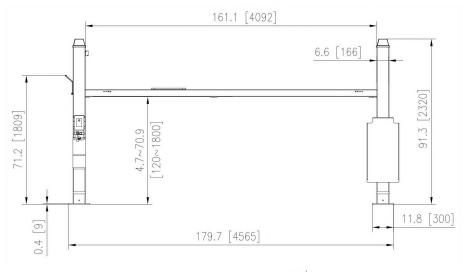

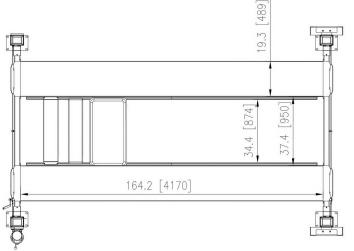



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 175" x 23" x 30" 1800lbs

Pump attached to lift. Included in dimensions Optional Wheel Kit 40" x 24" x 10" 120lbs

101 Applewood Dr Brighton ON K0K1H0 1-866-219-9991 / 613-475-5400 CustomerCare@daytonaproducts.com

www.DaytonaProducts.com



#### Daytona

#### LFPP10

10,000 LBS 4-POST PARKING LIFT

#### **Features**


- Four mechanical locking devices, each equipped with both primary and secondary safety locks
- · Single point manual safety release
- Removable Aluminum approach ramp
- Large heavy duty 3.5" cylinder
- Aircraft quality lifting cables
- Matted powder coat finish
- Adjustable runways
- Pump can be mounted on any post





Note: Product may vary slightly from image shown

# Daytona LFPP10 10,000 LBS 4-POST PARKING LIFT

Power - 120V 1.5HP 26Amp 1 PH 60Hz

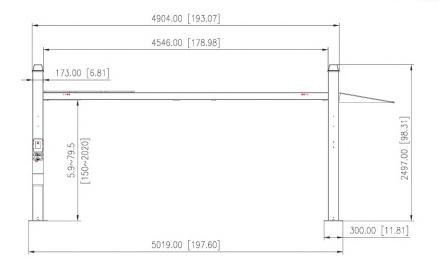

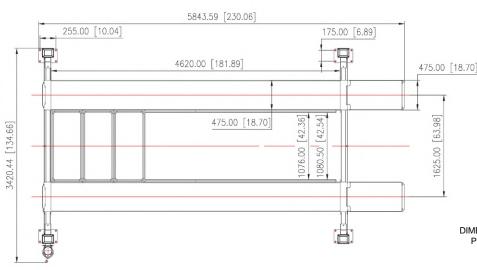



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 191" x 26" x 34" 2500lbs

Pump attached to lift. Included in dimensions

Optional Wheel Kit 40" x 24" x 10" 120lbs





#### **Features**


- Four mechanical locking devices, each equipped with both primary and secondary safety locks
- · Single point manual safety release
- Removable Aluminum approach ramp
- Large heavy duty 3.5" cylinder
- Aircraft quality lifting cables
- Matted powder coat finish
- Adjustable runways
- Pump can be mounted on any post


LFPP10-XLT

Note: Product may vary slightly from image shown



Power - 120V 1.5HP 26Amp 1 PH 60Hz

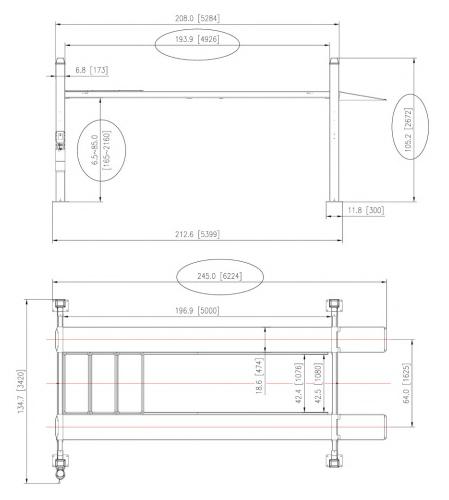



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 207" x 22" x 33" 2700lbs

Pump attached to lift. Included in dimensions Optional Wheel Kit 40" x 24" x 10" 120lbs 101 Applewood Dr Brighton ON K0K1H0 1-866-219-9991 / 613-475-5400 CustomerCare@daytonaproducts.com

www.DaytonaProducts.com



#### LFPA12



#### Daytona


# LFPA12 12,000 LBS 4-POST ALIGNMENT LIFT


- Ladder lock system with manual release has locking positions every 3.5" starting at 21"
- Tilting approach ramps in bright orange
- Large heavy duty 5" cylinder
- Aircraft quality lifting cables
- Matted powder coat finish in dark Grey
- Built in slip plates and adjustable turntables
- 25.5" runway accommodates various vehicle widths
- Will accommodate most dual rear wheel pickup trucks


# LFPA12 12,000 LBS 4-POST ALIGNMENT LIFT Specifications

Power - 240V 4 HP 15 Amp 1PH 60Hz

Rise Time - 110s Drop Time - 110s

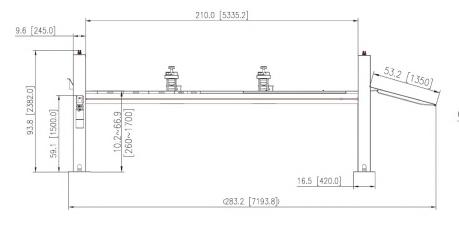



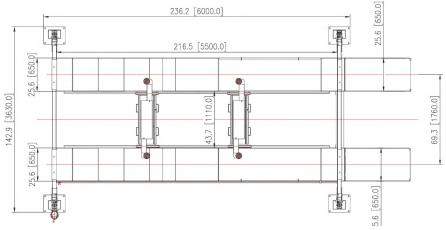

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 229" x 30" x 44" 4500lbs

Pump attached to lift. Included in dimensions



# LFPA14 14,000 LBS 4-POST ALIGNMENT LIFT


- Ladder lock system with manual release has locking positions every 3.5" starting at 21"
- Tilting approach ramps in bright Orange
- Large heavy duty 5" cylinder
- Aircraft quality lifting cables
- Matted powder coat finish in dark Grey
- Built in slip plates and adjustable turntables
- 25.5" runway accommodates various vehicle widths
- Will accommodate most dual rear wheel pick up trucks







Power - 240V 4HP 15Amp 1 Ph 60Hz

Rise Time - 110s Drop Time - 110s

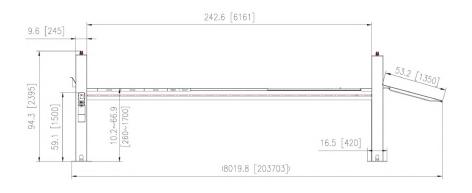

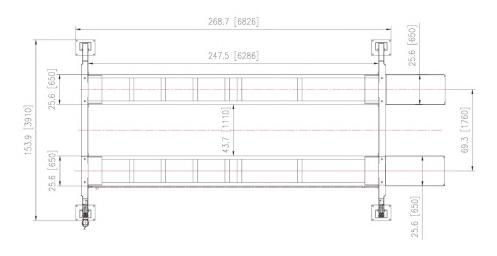



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 247" x 32" x 42" 5400lbs

Pump attached to lift. Included in dimensions





#### LFPA24


Note: Product may vary slightly from image shown


- Ladder lock system with manual release has locking positions every 3.5" starting at 21"
- Tilting approach ramps in bright Orange
- Large heavy duty 5" cylinder
- Aircraft quality lifting cables
- Matted powder coat finish in dark Grey
- Built in slip plates and adjustable turntables
- 25.5" runway accommodates various vehicle widths
- Will accommodate most dual rear wheel pick up trucks



#### **Specifications**

Power - 240V 4HP 15Amp 1 Ph 60Hz

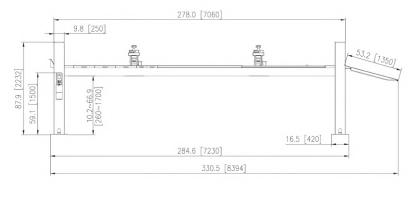

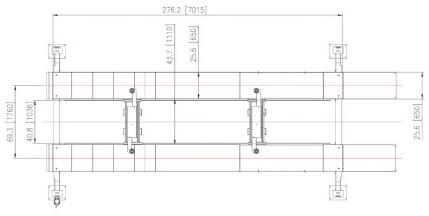

106.3 [2700]
35.4~63.0
[900~1600]
13.4 [340]
155.1 [3939]

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 278" x 33" x 65" 7800lbs

Pump attached to lift. Included in dimensions



- durability
- Height extensions included
- Ultrathin design for low vehicles and storage

#### **Specifications**


120V 1.5HP 15A 1PH 60Hz

6,000lb Capacity

Rise Time - 45 seconds

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 87" x 43" x 9" 900lbs Pump 31" x 14" x 12" 80lbs

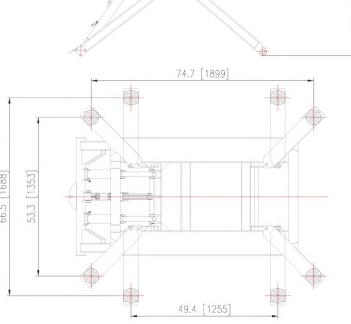







LHS7

Note: Product may vary slightly from image shown

#### **Specifications**

240V 3HP 12Amp 1PH 60Hz

6,600lb lifting capacity
Rise Time - 1 minute

- Double Hydraulic Equalizing system
- Solid steel construction ensures strength and safety
- Pneumatic actuated safety lock
- Approach ramps double as platform length extensions
- Powder coated finish for long lasting durability
- Low profile lowered height of 5"
- Lift controls and hydraulic power unit are contained inside the operation control station
- Lift comes with 4 rubber lifting blocks, 2.5" x 5" x 6.5" each
- Lift comes with 9ft hose to connect the lift to the power unit





#### LHS7


6,600 LBS HIGH-RISE SCISSOR LIFT

#### **Specifications**

Power - 240V 3 HP 12 Amp 1PH 60Hz



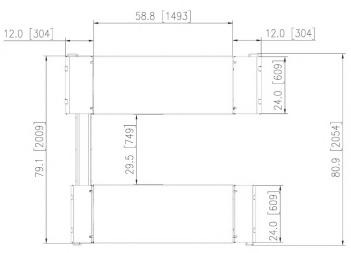



DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: Lift 67" x 26" x 17" 1700lbs Pump 20" x 15" x 43" 200lbs



### LMATV Raised



Note: Product may vary slightly from image shown

#### **Features**

- Removable side platform extensions gives you the option of leaving these on your lift to store and work on an ATV, or remove them for easy access when working on Motorcycles.
- Side ramps can be adjusted to accommodate varying ATV widths
- Center front and rear wheel drop out for easy Motorcycle wheel removal
- · Comes with a Wheel Mobility Kit
- Durable Powder Coat finish
- Simple operation with a convenient 2 button pendant safety controls your lift
- Comes with front wheel chock

#### Optional add-ons available for purchase:

- · Front Wheel Vice, LPYON-056
- Center 1,100lb Capacity Mini Jack, LPYON-057




#### **LMATV**

2,200 LBS MOTORCYCLE ATV COMBO LIFT

#### **Specifications**

Power 120V 1HP 8A 1PH 60Hz

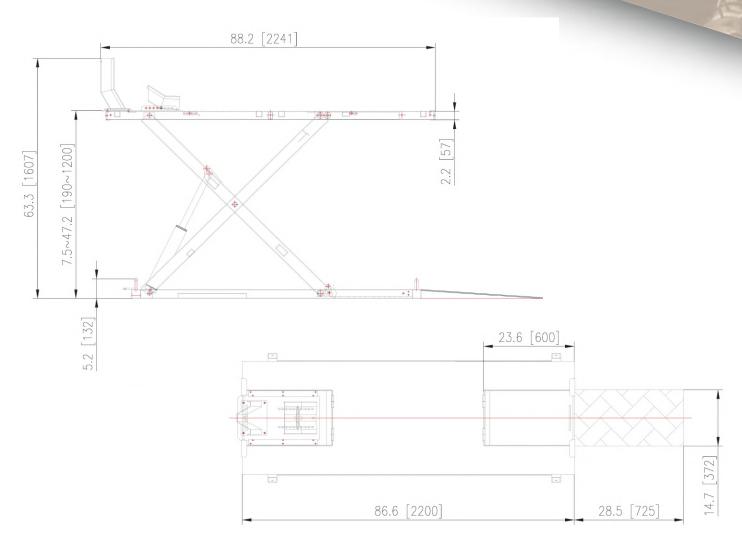

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM


Shipping Dimensions: Lift 87" x 34" x 8" 700lbs

Optional Mini Jack 21" x 13" x 5" 45lbs Optional front wheel vice 23" x 18" x 9" 40lbs





Shipping Dimensions: Jack 41" x 26" x 17" 380lbs

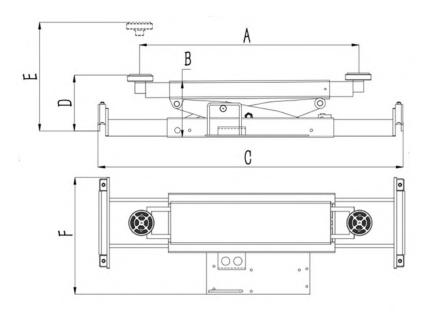

#### **Features**

Our 5,000 lbs lifting capacity rolling jack is built to accompany our 9k and 10k Parking Lifts

#### **Specifications**

Air Pressure-110-150Psi

A - Min 35-1/2" - Max 63-1/2"

B - Min 8-1/2"

C - Min 34-1/2" - Max 51"

D - Min 8-1/2"

E - 20-1/2" on lock height

F - 22"

#### **Extra**

 Bottom of wheel to bottom of jack is 3-1/2"

Please note, our jacks are designed to fit with Daytona Lifts and may not fit all other brands of Parking Lifts. Our RAJ5 Rolling Jacks sit flush with the Platform of the 4-Post lift they are built to accompany. For more information please contact our Sales Reps at 613 475 5400. Or Email customercare@daytonaproducts.com



#### ROLLING JACK RAJ8



Shipping Dimensions: Jack 46" x 26" x14" 400lbs

### 

#### **Features**

Our 8,000 lbs lifting capacity rolling jack is built to accompany our 12k and 14k Alignment Lifts

#### **Specifications**

Air Pressure-110-150Psi

A - Min 32-1/2" - Max 69-1/4"

B - Min 8"

C - Min 41-1/2" - Max 45-1/2"

D - Min 7"

E - 19-3/4" on lock height

F - 21"

#### Extra

- Pad extensions are 2-3/4"
- Bottom of wheel to bottom of jack is 3-5/8"

Please note, our jacks are designed to fit with Daytona Lifts and may not fit all other brands of Alignment Lifts. Our RAJ8 Rolling Jacks sit flush with the Platform of the 4-Post lift they are built to accompany. For more information please contact our Sales Reps at 613 475 5400. Or Email customercare@daytonaproducts.com



#### **Specifications**

- Cycle time 10 seconds
- Max Wheel Diameter 35"
- Rim width 1" 20"
- Rim diameter 9.5" 24"
- Max Wheel weight 143lbs
- Accuracy 1gr
- Shaft Diameter 36mm x 6.5"
- Power 120V 1/6 HP 5A 1PH 60Hz

**Features** 

- Self Calibrating
- On board sensor diagnosis and testing

Daytona

**BL-917** 

**BASE MODEL** 

WHEEL BALANCER

- ST, DYN, AL1, AL2, AL3 balancing methods
- Motorcycle wheel balancing mode
- On/off hood operation also with hood start mode
- Weight storage
- Pegs for accessories
- 6.5" long shaft with 36mm diameter
- Speed nut, hammer and caliper
- Comes with 4 cones ranging from 1-3/4" to 6-1/8"

#### **Space Requirements**

44"W x 50"D x 68"H

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions:37" x 28" x 46" 300lbs



Note: Product may vary slightly

from image shown

**Space Requirement** 49"W x 54"D x 72"H

#### **Specifications**

- Cycle time 7 seconds
- Max Wheel Diameter 39"
- Rim width 1" 20"
- Rim diameter 9.5" 24"
- Max Wheel weight 150lbs
- Accuracy 1gr
- Shaft Diameter 40mm x 8"
- Power 120V 1/6 HP 5A 1PH 60Hz

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions: 44" x 28" x 46" 350lbs

- ST, DYN, AL 1, AL2, AL3 balancing
- Motorcycle wheel balancing mode
- On/off hood operation also with hood start mode (Hood included)
- On/off beep indicator
- Weight storage
- Pegs for accessories
- 8" long shaft with 40mm diameter
- Five auto STD centering cones
- Speed nut, hammer and caliper
- Complete operations manual



#### **Specifications**

- Cycle time 5-7 seconds
- Max Wheel Diameter 44"
- Rim width 2" 20"
- Rim diameter 8" 35"
- Max Wheel weight 165lbs
- Accuracy 1gr

BL-956

- Shaft Diameter 40mm x 8.5"
- Power 120V 1/6 HP 5A 1PH 60Hz

**Space Requirement** 54"W x 44"D x 58"H

#### Daytona

#### **BL-956 HEAVY DUTY** WHEEL BALANCER

Self Calibrating

- LED touch-panel keypad with easy to read icons assisting operators utilizing all balancing functions
- Balance up to 44" overall wheel diameter
- Comes with 4 cones ranging from 1-3/4" to 6-1/8"
- Multi-Mode Vehicle Balancing standard with SUV, Car & Motorcycle balancing modes
- At 140 R P M the balancer's life is further extended for sensitive electronics & moving components while providing highly accurate wheel balancing
- Auto measurement input for distance & diameter with 5 balancing modes including 2 ALU Smart modes
- Laser Indicator lights up automatically at the unbalance weight position in ALS mode
- Measurement Acquisition Wand allows for ease of acquiring measurement data with a retractable measuring tool
- Light Indicator illuminates inside of wheel automatically at the unbalanced weight position
- Foot Pedal Braking System conveniently secures wheel in the unbalanced position to accurately apply balance wheel weights
- Speed-Nut Mounting easily secures the wheel to the spindle with convenient lead-in screw
- Multi-Pocket Wheel Weight Shelf featuring 14 articulated pockets, over 1.5" deep, allowing plenty of storage for weights & tooling
- The large wheel hood prevents debris from flying off the tire while in use
- Power Saving Mode automatically puts machine in stand-by mode after 5 minutes of non-usage
- On board sensor for diagnostic testing. Pegs for holding accessories
- Hidden weight function. Tire matching function
- Motorcycle wheel balancing mode

Shipping Dimensions: 39" x 30" x 46" 400lbs





**BL-630M** 

Note: Product may vary slightly from image shown


#### Space Requirements 40" x 50" x 14.5"

DIMENSIONS, COLOURS AND ITEMS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DUE TO OUR CONTINOUS IMPROVEMENT PROGRAM

Shipping Dimensions:42" x 22" x 46" 350lbs

#### **Features**

- Rim Diameter 1"-25"
- Max Wheel weight 110lbs
- Max Wheel diameter 31"
- Max Rim width 7.5"
- Power Supply 100/230V
- Balancing time 10sec
- Machine net weight 237lbs





TC-880

#### **Specifications**

- Inside Rim Clamping 12" 23"
- Outside Rim Clamping 10" 22"
- Max Tire Diameter 38"
- Max Wheel Width 13"
- Air Pressure 120 145 psi
- Power 120V 1.5HP 20A 1Ph 60Hz

Shipping Dimensions: 39" x 43" x 37" 600lbs

- Manual operation of mount/
- Four pneumatic clamps and double acting cylinders
- Side mounted bead breaker with 2.75 tons of force
- Integrated bead seating jets in the clamps
- Includes water separator, lubricator and air pressure regulator
- ATV clamps also available

**Space Requirement** 44"W x 46" D x 72"H



#### **Specifications**

TC-890

- Inside Rim Clamping 13" 26"
- Outside Rim Clamping 13" 28"
- Max Tire Diameter 40"
- Max Wheel Width 15"
- Air Pressure 120 145 psi
- Bead Breaker Force 2.75tons/2500kg
- Power 120V 1.5HP 20A 1Ph 60Hz

- Heavy Duty tire changer safely handles
- Handles stiff, wide and low profile tires with ease
- Self-centering device
- Adjustable inflating device
- Rim Clamp rubber shoes included to protect chrome rims
- Pneumatic bead breaker system
- Oversized bead seating air blaster
- Efficient mounting and demounting with the air operated bead lifting and pressing feature
- Air Lubricator and Air Filter included
- Water trap and air regulator included

**Space Requirement** 82"W x 48" D x 76"H



#### **Specifications**

- Inside Rim Clamping 15" 28"
- Outside Rim Clamping 13" 26"
- Max Tire Diameter 42"

TC-890T

- Max Wheel Width 14"
- Air Pressure 120 145 psi
- Bead Breaker Force 2.75tons/2500kg
- Power 120V 1.5HP 20A 1Ph 60Hz

- Tilting column, pneumatic locking system
- Heavy duty tire changer safely handles most
- Handles stiff, wide and low-profile tires with
- Comes with Rim clamp protectors included to protect chrome rims, and dismount head protectors
- Adjustable inflating device
- Oversized bead seating air blaster
- Efficient mounting and demounting with the air operating bead lifting and pressing feature
- Air lubricator and air filter included
- Water trap and air regulator included
- Soap reservoir included
- ATV clamp also available

**Space Requirements** 66"W x 69" D x 79"H





TC-806M Note: Product may vary slightly from image shown


#### **Space Requirements**


44" x 48 " x 77"

Shipping Dimensions: Body Box 39" x 30" x 37" 500lbs Arm Box 25" x 19" x 13" 100lbs

#### **Features**

- Outside clamping range 6"-24"
- Rim Width 3"-12"
- Max Wheel diameter 37"
- Bead breaking force 2500kg
- Power Supply 110V/220V
- Rotations per minute 6.5rpm
- Machine net weight 395lbs







#### **COMING SOON ITEMS**

- LTPP6 Two Post Stackable Parking Lift with a 6,000lb lifting capacity
- 3-tier Stackable 2-Post Parking Lifts coming soon!
- RAJ12 Rolling Jacks made for our 24,000lb capacity Alignment lifts.
- WAM-S6 Wheel Alignment Computer with Standard functions.
- WAM-A8 Wheel Alignment Computer with Advanced functions.
- LFPA35 35,000lb 4-Post Alignment Lift
- RAJ22 Rolling Jacks made for our 35,000lb capacity Alignment lifts.

101 Applewood Dr Brighton ON K0K1H0 1-866-219-9991 / 613-475-5400 CustomerCare@daytonaproducts.com

www.DaytonaProducts.com



Supplier of quality affordable automotive equipment

## We look forward to working with you

Visit our website to download Blueprints for all of our active items!

101 Applewood Dr Brighton ON K0K1H0 1-866-219-9991 / 613-475-5400 CustomerCare@daytonaproducts.com

www.DaytonaProducts.com